



FLAVEL

Makes anywhere feel like home

G A S F I R E S 2 0 0 9



What could be more reassuring than the knowledge that your gas fire comes from a long standing leader in home heating. Flavel.

Flavel gas fires are renowned for high heat output across one of the largest choices of styles and features in the UK. From contemporary to traditional, slimline to full depth, and with coal, pebble and driftwood options on our inset gas fire models. The Flavel range also includes many outset and wall mounted gas fires, with powerflue and balanced flue models for homes without chimney applications.



There is also the peace of mind of a 3 year guarantee on every model, and the reassurance of the Flavel Airwatch System on all living flame effect fires. This device immediately cuts off the gas supply in the unlikely event of the flame being extinguished through blockage.

Helping you make the right decision

A fireplace is one of the most important purchases you will make for your home. It is the main feature in your living area so it must look stunning and also suit your practical needs.

Some gas fires will only fit certain chimneys or flues so, before you choose a new fire check the chimney and flue in your home. The guide on page 6 will help you identify which type of chimney or flue you have. With this in mind, when you browse through this brochure the symbols on each product page will make it clear which fires will correspond to your requirements.

Take a look too at the control symbols on page 4 so that again, before you begin, you can select the control that will suit your lifestyle. Some controls are more easily accessible than others; for example a slide control is easy to use and reduces the need to bend when turning the fire on and off. Whilst for the ultimate in luxury, a remote control option means you can control your fire without leaving your seat.



Makes anywhere feel like home

What's your type?

Living Flame Effect pages 6-32

A Living Flame Effect fire (LFE) has real-flame appeal and is available in two types:

LFE Convector



A convector fire draws cold air in and sends it back out as hot air, maximising heat output whilst keeping your fuel bills down.

LFE Radiant



This type of LFE fire radiates heat from the combustion chamber only – which is why Flavel incorporate a glowing back panel to maximise heat output.

Radiant pages 33 - 41



The Flavel radiant fires incorporate glowing radiants and can run on as little as 6.4p per hour on the maximum setting.

What's your style?

high efficiency

Warm your home efficiently & beautifully.
Our high efficiency fires use less energy, so
you can save on those fuel bills!

Pages 6 - 11



The Caress HE - Page 7

Hole-in-the-wall

Distinctive, modern & different.
Completely change your living space with
a fire set within the wall.

Pages 12 - 16



The Diamond - Page 15

Slimline

Make a contemporary twist on the traditional
fireplace. The versatile slimline range will fit
almost any chimney or flue.

Pages 17 - 24



The Windsor Contemporary - Page 19

Full Depth

Our full depth fire range combines
brilliant flame effects with outstanding
heat output for maximum effect.

Pages 25 - 32



The Richmond - Page 25

Outset

Highly efficient radiant fire range,
designed to suit your needs & stylish
design tastes.

Pages 33 - 41



The Strata - Page 38

Contents

Choosing the right type of fire	2
Guide to symbols	4
HE fires	5
The Diamond HE	6
The Caress HE	7
The Kenilworth HE	8
The Linear HE	9
The Raglan HE	10
The Orchestra HE	11
The Curve	12
The Vesta	13
The Finesse	14
The Diamond	15
The Stirling	16
The Windsor Classic	17
The Windsor Traditional	18
The Windsor Contemporary	19
The Caress Slimline	20
The Warwick	21
The Atlanta	22
The Melody	23
The Waverley	24
The Richmond	25
The Caress Traditional	26
The Caress Contemporary	27
The Calypso	28
The Rhapsody	29
The Linear	30
The Kenilworth	31
The Renoir	32
The Emberglow	33
The Regent	34
The Regent LFE	35
The Firenza	36
The Welcome	37
The Strata	38
The Misermatic	39
The Renaissance	40
The Thurcroft	41
Sizes and Dimensions	42
Builders' Opening Sizes	43

Guide to Symbols

Type of Chimney or Flue

The type of chimney or flue you have dictates the type of fire you can have. But if you're not sure, then take a look at your roof and compare it with the simple guide below.

It's worth remembering that a full depth fire often requires a traditional chimney or rebate on the fire surround, whilst a slimline fire will fit virtually any chimney or flue.

Brick Chimney

Apart from products designed for "no chimney" applications, all Flavel products will fit brick chimneys.

They are easily recognisable by a chimney stack with accompanying terracotta pot or gas terminal.



Pre-Fabricated Flue

Pre-fabricated flues are easily identifiable by a metal flue and terminal on the roof and a metal flue box behind the fire.



Pre-Cast Flue

Pre-cast flues can be identified by a ridge vent or metal flue tube and terminal on the roof.

Constructed from concrete or clay blocks they form a rectangular section flue. All Flavel fires featuring this icon are only suitable for Pre-Cast flues conforming to BS EN 1858.



Can't see a Chimney or Flue?

If you can't see a chimney or flue like the ones described above, then you will require either a Balanced Flue, a Powerflue or an electric fire.

Powerflue

Powerflue fires use an electronically driven fan unit mounted on the external wall to expel the flue gases directly outside the building.



Balanced Flue

Balanced Flue fires use a horizontal pipe to vent directly outside. An electricity supply is not required for Balanced Flue products.



Controls

Manual Control

Simple and discreet



Top Control

Twist ignition and control means you don't have to bend down



Slide Control

Convenient control that eliminates the necessity of bending down



Remote Control

Control your fire without leaving your seat



Power Supply

Your gas supply will either be natural gas or LPG, depending on the area in which you live.

Natural Gas

You are most likely to have this gas supply



LPG

LPG is the most popular alternative to natural gas



highefficiency

Get up to 89% net efficiency from your gas fire...

Flavel has always had a reputation as a manufacturer of some of the most efficient fires on the market. Now we have set new industry standards with the introduction of the Flavel HE high efficiency range: exceptional heat output combined with lower running costs compared to standard gas fires.

Flavel's R&D team has invested in developing the technology to meet the key objective of producing gas fires that save energy and as a result, help to keep costs down.



Hole-in-the-wall Fires



The Diamond HE - Page 6
78% net efficiency



Inset Fires



Conventional flue

The Caress HE
- Page 7

89% net efficiency

The Kenilworth HE
- Page 8

The Linear HE
- Page 9

78% net efficiency



Balanced flue

The Raglan
- Page 10

The Orchestra
- Page 11

80% net efficiency



Outset Fires



LFE Convector

The Emberglow
- Page 33

78% net efficiency



LFE Radiant

The Strata
- Page 38

The Misermatic
- Page 39

The Renaissance
- Page 40

84% net efficiency



high efficiency

As Flavel's debut high efficiency hole-in-the-wall fire, the Diamond HE is a contemporary and economical heating solution with a net efficiency of 78%. This fully glass fronted model features the stunning 'Diamond' fascia design and is available with a choice of coal or pebble fuel bed.



The Diamond HE with pebble fuel bed



The Diamond HE with coal fuel bed



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Remote Control

The Diamond HE

Living Flame Effect - Hole-in-the-wall

Safety

Flame Supervision Device

Type of heat

Radiant & Convected

Heat input - high

4.5kW

Heat input - low

3.5kW

Heat output - high


3.2kW

Heat output - low

2.4kW

Dimensions of fire

- A 650mm
- B 600mm
- C 550mm
- D 180mm
- E 65mm

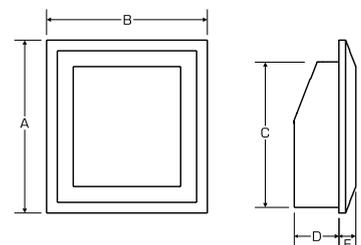



high efficiency

The Caress HE is the first model in the Flavel 'high efficiency' range and has an incredible 89% net efficiency combined with a 4kW heat output. This glass fronted product comes with a high quality trim and fret, and is available with a choice of Traditional or Contemporary look. Both versions are available in either brass or polished cast iron with the option to choose manual, slide or remote control.




The Caress HE Traditional in solid brass





The Caress HE Contemporary in polished cast iron

The Caress HE

Living Flame Effect - Full Depth Inset Convectector



Dimensions of fire
A 510mm
B 615mm
C 550mm
D 230mm
E 400mm



Heat input - high
Heat input - low
Heat output - high
Heat output - low

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

5kW

3.5kW

4kW

1.8kW



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Manual Control



Slide Control



Remote Control



high efficiency

The Kenilworth HE offers an impressive 78% net efficiency and is designed to fit most chimney and flue types.



The Kenilworth with black trim and Balmoral fret



The Kenilworth with brass trim and Grace fret



The Kenilworth with silver trim and Grace fret



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Plain Back



Remote Control



Manual Control



The Kenilworth with brass trim and Balmoral fret


The Kenilworth HE

Living Flame Effect - Full Depth Inset Convector

Safety
Flame Supervision Device



Type of heat
Radiant & Convected

Heat input - high	4.5kW
Heat input - low	3.5kW
Heat output - high	3.2kW
Heat output - low	2.4kW



Dimensions of fire

A	485mm
B	594mm
C	547mm
D	326mm
E	180mm
F	110mm
G	365mm





high efficiency

The Linear HE is styled on our popular Linear design combining a modern, minimalist Stainless Steel fascia with ribbed black panel detail. This model is available with a choice of coal or pebble fuel bed.




Linear HE with pebble fuel bed





The Linear HE with coal fuel bed

The Linear HE

Living Flame Effect - Full Depth Inset Convector



- Dimensions of fire
- A 485mm
 - B 594mm
 - C 550mm
 - D 327mm
 - E 180mm
 - F 110mm
 - G 365mm



- Heat input - high
- Heat input - low
- Heat output - high
- Heat output - low

Safety
Flame Supervision Device

Type of heat
Radiant & Convected

- 4.5kW
- 3.5kW
- 3.2kW
- 2.4kW



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast



Ribbed Back



Manual Control



high efficiency

The stylish Raglan Balanced Flue is designed to fit into houses without a chimney or flue and its glass front does more than simply look great... it increases efficiency too.

Also available in silver.



The Raglan with brass trim and Brass Blenheim fret



Natural Gas



Balanced Flue



Plain Back



Manual Control


The Raglan HE

Living Flame Effect - Slimline Inset Balanced Flue

Safety
Flame Supervision Device


Type of heat
Radiant & Convected

Heat input - high	3.8kW
Heat input - low	2.5kW
Heat output - high	2.8kW
Heat output - low	1.7kW

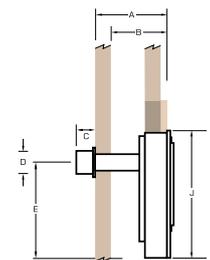

Dimensions of fire

A	675mm max
B	130mm min
C	95mm
D	145mm
E	435mm
F	145mm
G	400mm
H	125mm
I	470mm
J	620mm





high efficiency

If you want the warmth and mood created by a living flame fire yet don't have a chimney or flue, then the Orchestra is the perfect solution. This neat, glass fronted inset fire is framed by a chamfered trim and sleek fret.




The Orchestra with brass trim and Antique Royale fret



The Orchestra with satin silver trim and Satin Silver and Black Royale fret

The Orchestra HE

Living Flame Effect - Slimline Inset Balanced Flue

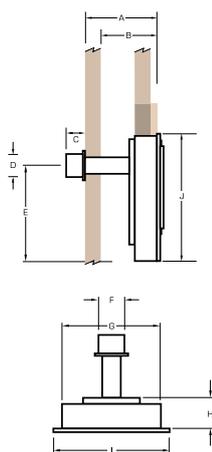

Dimensions of fire

A	675mm max
B	130mm min
C	95mm
D	145mm
E	435mm
F	145mm
G	400mm
H	125mm
I	470mm
J	620mm

Heat input - high	3.8kW
Heat input - low	2.5kW
Heat output - high	2.8kW
Heat output - low	1.7kW

Safety
Flame Supervision Device

Type of heat
Radiant & Convected



Natural Gas



LPG



Balanced Flue



Plain Back



Manual Control



high efficiency

The Curve “hang-on-the-wall” fire with its sleek lines, textured fascia and glass front, compliments the unique and complex flame pattern created by an undulating back panel. This stunning fire is easy to install as it literally hangs on the wall, rather than slotting into the structure.

The Curve is perfectly suited to contemporary homes requiring state-of-the-art appearance and performance.



The Curve in Graphite




The Curve

Living Flame Effect - Hang-on-the-wall


Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Heat input - high	6.5kW
Heat input - low	4.2kW
Heat output - high	4.0kW
Heat output - low	1.5kW

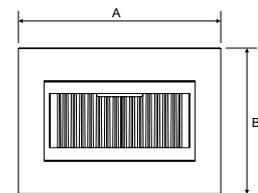

Dimensions of fire
A 870mm
B 635mm
C 166mm
D 445mm



-  Natural Gas
-  Brick Chimney
-  Pre-Fabricated (BS EN 1858)
-  Pre-Cast (BS EN 1858)
-  Ribbed Back
-  Fully Automatic Remote Control



The Vesta with coal fuel bed


Specifically designed to fit a standard Pre-Cast flue this slimline hole-in-the-wall fire is highly contemporary with its reflective black and stainless steel fascia and a choice of manual or remote control operation. It offers a further choice of coal or pebble fuel bed.



The Vesta with pebble fuel bed

The Vesta

Living Flame Effect - Slimline Hole-in-the-wall

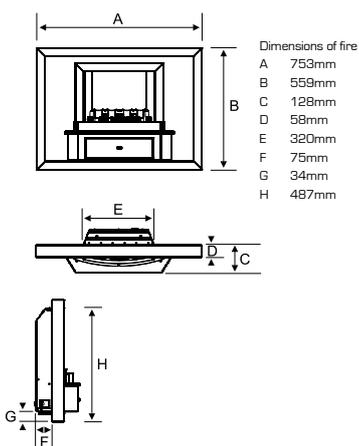

Heat input - high
Heat input - low
Heat output - high
Heat output - low

Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant

6.5kW
4.2kW
3.6kW
1.5kW



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast



Plain Back



Remote Control



Manual Control

The most versatile hole-in-the-wall gas fire from Flavel. The Finesse will fit virtually any flue and is available in three different variations – a brass trim option to suit a classical setting and two chrome trim options for a more contemporary feel.



The Finesse with coal fuel bed and chrome trim



The Finesse with pebble fuel bed and chrome trim



The Finesse with coal fuel bed and brass trim



-  Natural Gas
-  Brick Chimney
-  Pre-Fabricated
-  Pre-Cast (BS EN 1858)
-  Plain Back
-  Manual Control


The Finesse

Living Flame Effect – Slimline Hole-in-the-wall


Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant

Heat input - high	6.5kW
Heat input - low	2.2kW
Heat output - high	3.3kW
Heat output - low	1.0kW



Dimensions of fire
A 558mm
B 690mm
C 550mm
D 120mm
E 329mm
F 50mm

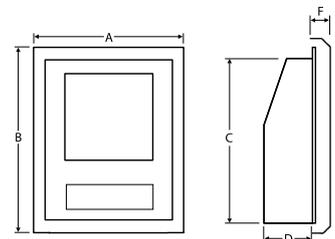



This stunning hole-in-the-wall fire boasts a realistic living flame effect and will perfectly complement a contemporary room setting. Framed by a polished aluminium and black trim, the Diamond has a full depth two-tone pebble fuel bed or coal bed option, giving a heat output of 3.3kW.



The Diamond with coal fuel bed




The Diamond with pebble fuel bed

The Diamond

Living Flame Effect - Hole-in-the-wall

Dimensions of fire

- A 650mm
- B 600mm
- C 550mm
- D 170mm
- E 65mm

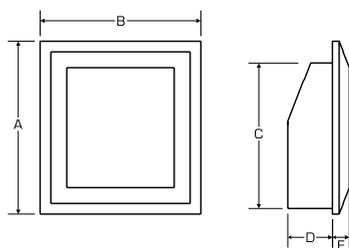

Safety
Flame Supervision Device & Oxygen Depletion Sensor

Type of heat
Radiant

Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	3.3kW
Heat output - low	1.5kW



Natural Gas



Brick Chimney



Pre-Fabricated



Remote Control

Slimline to fit into all flue types, with a very impressive heat output.

And to ensure the Stirling suits all requirements, a slide control model has also been designed.



The Stirling with brass trim and Antique Blenheim fret.



The Stirling with black trim and Black Blenheim fret




The Stirling

Living Flame Effect – Slimline Inset Convector



Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Heat input - high	6.5kW
Heat input - low	4.2kW
Heat output - high	3.6kW
Heat output - low	1.5kW



Dimensions of fire
A 485mm
B 594mm
C 590mm
D 350mm
E 125mm
F 90mm
G 322mm





The Windsor Classic in brass


The popular and versatile Windsor range now includes a Classic model. Its clean lines ensure that it will fit beautifully into both traditional and contemporary homes. Featuring a coal fuel bed with a choice of brass or silver trim and fret. The Windsor Classic has a heat output of 3.3kW per hour.





The Windsor Classic in silver

The Windsor Classic

Living Flame Effect - Slimline Inset Radiant



Dimensions of fire
 A 475mm
 B 592mm
 C 550mm
 D 302mm
 E 120mm
 F 70mm
 G 329mm



Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety
 Flame Supervision Device & Airwatch Sensor

Type of heat
 Radiant

6.5kW
 2.2kW
 3.3kW
 1.0kW



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast (BS EN 1858)



Plain Back



Manual Control

With its authentic fuel bed and gently flickering flame, the Windsor is as warm and welcoming as any real coal fire. An optional brick-effect firebox adds to its cosy charm and it fits beautifully into all flue types including pre-cast, (BS1289).



The Windsor Traditional with silver trim and fret



The Windsor Traditional with brass trim and fret

-  Natural Gas
-  Brick Chimney
-  Pre-Fabricated (BS EN 1858)
-  Pre-Cast (BS 1289)
-  Plain Back
-  Brick Back
-  Manual Control


The Windsor Traditional

Living Flame Effect - Slimline Inset Radiant



Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant

Heat input - high	6.5kW
Heat input - low	2.2kW
Heat output - high	3.3kW
Heat output - low	1.0kW



Dimensions of fire
A 475mm
B 592mm
C 550mm
D 302mm
E 120mm
F 70mm
G 329mm





Windsor Contemporary Pebble and silver trim

Stunning styling makes the Windsor Contemporary the centrepiece of your room. It fits into any flue, including pre-cast (BS1289), and features a range of fuel beds with a beautiful, natural flame.



Coal fuel bed with brass trim




Driftwood fuel bed with silver trim





Pebble fuel bed with brushed steel trim

The Windsor Contemporary

Living Flame Effect - Slimline Inset Radiant



Dimensions of fire
 A 475mm
 B 592mm
 C 550mm
 D 302mm
 E 120mm
 F 70mm
 G 329mm



Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety
 Flame Supervision Device & Airwatch System

Type of heat
 Radiant

6.5kW
 2.2kW
 3.3kW
 1.0kW



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Plain Back



Manual Control

Featuring a high quality cast trim and fret, the Caress Traditional Slimline is a striking feature in homes where a full depth fire is not a suitable option. Manual control and slide control models are available.*

*Coal bed and flame picture differs between manual and slide control models



Caress Slimline slide control with polished cast iron trim and fret



Caress Slimline manual control with polished brass trim and fret

-  Natural Gas
-  Brick Chimney
-  Pre-Fabricated (BS EN 1858)
-  Pre-Cast (BS EN 1858)
-  Plain Back
-  Manual Control
-  Slide Control



The Caress Slimline

Living Flame Effect - Slimline Inset Radiant

Safety
Flame Supervision Device & Airwatch System


Type of heat
Radiant

	Manual	Slide
Heat input - high	6.5kW	6.5kW
Heat input - low	2.2kW	4.2kW
Heat output - high	3.3kW	3.3kW
Heat output - low	1.0kW	1.6kW



Dimensions of fire
Manual Control
A 475mm
B 592mm
C 550mm
D 302mm
E 120mm
F 70mm
G 329mm

Slide Control
A 491mm
B 605mm
C 550mm
D 325mm
E 105mm





The Warwick with brass trim and Brass Balmoral fret

This ultra slim Warwick means it will fit almost any chimney or flue, and has an impressive 3.5kW heat output.



The Warwick with black trim and Black Balmoral fret




The Warwick brass with Grace fret





The Warwick silver with Grace fret

The Warwick

Living Flame Effect - Slimline Inset Radiant



Dimensions of fire
 A 485mm
 B 594mm
 C 550mm
 D 325mm
 E 100mm



Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety
 Flame Supervision Device & Airwatch System

Type of heat
 Radiant

6.5kW
 4.2kW
 3.3kW
 1.5kW



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 185B)



Pre-Cast (BS EN 185B)



Powerflue†



Plain Back



Manual Control

Simplicity of form.
 Complexity of flame. The
 Atlanta's clean lines
 compliment its clean
 burning efficiency. The
 glass front amplifies a
 unique flame pattern
 through an undulating
 back panel and its sleek
 design ensures easier
 and cheaper installation.
 Offset against a brushed
 steel trim it conjures
 up an ethereal yet
 comforting minimalism.



The Atlanta


Flame Pattern Effect - Slimline Inset Radiant

Safety
 Flame Supervision Device

Type of heat
 Radiant & Convected

Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

	Conventional Flue	Balanced Flue ● high efficiency
Heat input - high	4.7kW	4kW
Heat input - low	2.5kW	2.5kW
Heat output - high	2.0kW	2.8kW
Heat output - low	1.5kW	1.7kW

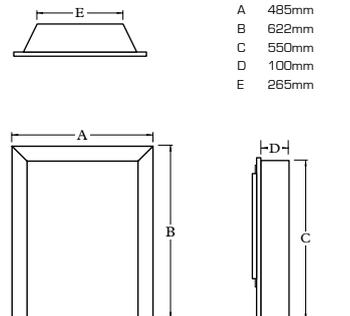

Natural
Gas



Brick
Chimney



Pre-
Fabricated (BS EN 1858)



Pre-Cast
(BS EN 1858)



Balanced
Flue



Plain
Back




Manual
Control



The Melody with satin silver trim and Satin Silver and Black Royale fret


The Melody is an elegant slimline fire enabling installation in almost any flue including pre-cast. The discreet slide control ensures convenient operation with a heat output of up to 3.3kW.

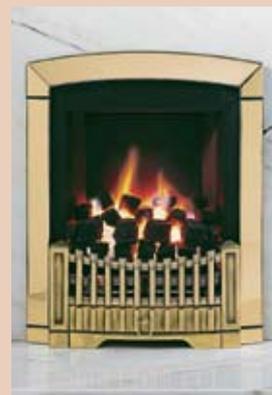

The Melody with brass trim and Brass Royale fret. Also available in black, and antique.

The Melody

Living Flame Effect - Slimline Inset Radiant

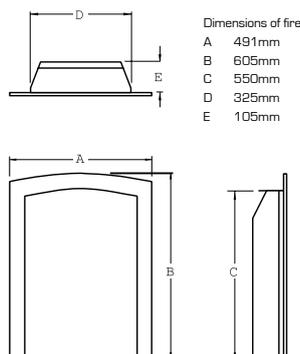

Heat input - high
Heat input - low
Heat output - high
Heat output - low

Safety
Flame Supervision Device

Type of heat
Radiant

6.5kW
4.2kW
3.3kW
1.6kW



Natural Gas LPG



Brick Chimney Pre-Fabricated (BS EN 1858) Pre-Cast



Plain Back



Slide Control

The Waverley, with its beautiful decorative flame effect, is a perfect replacement for a solid fuel grate. The 16" tapered inset tray is designed to fit a standard 16" fireback, providing a realistic coal effect for almost any style of fireplace.

Fret not included.



The Waverley inset tray shown with black Bauhaus fret



Natural Gas



Brick Chimney



Pre-Fabricated



Manual Control

The Waverley

Decorative Flame Effect - Inset Tray

Safety

Flame Supervision Device & Oxygen Depletion Sensor

Type of heat

Radiant

Heat input - high

6.9kW

Heat input - low


4.2kW

Heat output - high

2.0kW

Heat output - low

1.5kW



Dimensions of fire
A 350mm
B 205mm
C 230mm

Designed to fit standard 16" (400mm) chairbrick



The Richmond with brass trim and Antique Blenheim fret

This full depth convector fire combines a brilliant flame-effect with the efficiency and outstanding warmth of a 4kW heat output. Available in black or brass, with manual, slide or remote control.




The Richmond with black trim and black fret





The Richmond with silver trim and silver fret

The Richmond

Living Flame Effect - Full Depth Inset Convector



Dimensions of fire
 A 485mm
 B 594mm
 C 550mm
 D 250mm
 E 400mm



Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

6.9kW

4.2kW

4.0kW

1.5kW



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Manual Control



Slide Control



Remote Control

The Flavel Caress Traditional is an open fronted full depth living flame effect convector fire that comes with a stylish trim and fret, and is available in a choice of solid brass or polished cast iron. Choose from a manual, slide or remote control operation.



The Caress Traditional in polished cast iron



The Caress Traditional with solid brass trim and fret



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Manual Control



Slide Control



Remote Control

The Caress Traditional

Living Flame Effect - Full Depth Inset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high

6.9kW

Heat input - low


4.2kW

Heat output - high

4.0kW

Heat output - low

1.5kW



Dimensions of fire



A 510mm

B 615mm

C 550mm

D 250mm

E 400mm





The Caress Contemporary in polished cast iron finish


The Flavel Caress Contemporary gives a modern slant to this fire model which boasts an impressive 4kW heat output. It's also available in a choice of brass or polished cast iron trim and fret option.





The Caress Contemporary with solid brass trim and fret

The Caress Contemporary

Living Flame Effect – Full Depth Inset Convector



Dimensions of fire
 A 510mm
 B 615mm
 C 550mm
 D 250mm
 E 400mm



Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low
 Efficiency

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

6.9kW

4.2kW

4.0kW

1.5kW

58%



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Manual Control



Slide Control



Remote Control

The Calypso successfully combines exceptional fire design with today's necessity for convenience in the form of a user friendly dual directional slide control. Add to this a full depth fuel bed for maximum effect and you have the perfect fire for modern living.



The Calypso with brass trim and Antique Blenheim fret


The Calypso

Living Flame Effect - Full Depth Inset Convector



Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	3.9kW
Heat output - low	1.7kW



Dimensions of fire
 A 491mm
 B 605mm
 C 549mm
 D 254mm
 E 400mm



Natural Gas



Brick Chimney



Pre-Fabricated



Plain Back



Slide Control



With its elegant arc trim and striking fret the Rhapsody is a classic. The full depth coal bed creates a beautiful flame picture and underglow, virtually indistinguishable from a real coal fire.




The Rhapsody with black trim and black Royale fret
Also available in silver or antique brass



The Rhapsody with black trim and Black Royale fret

The Rhapsody

Living Flame Effect – Full Depth Inset Convector

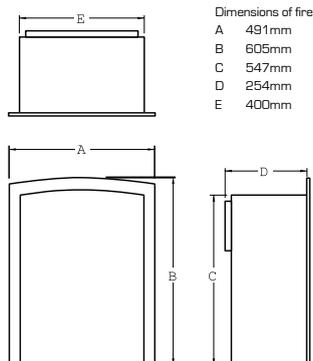

Heat input - high
Heat input - low
Heat output - high
Heat output - low

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

6.9kW

4.2kW

4.0kW

1.7kW



Natural Gas



LPG



Brick Chimney



Pre-Fabricated



Plain Back



Slide Control

A stunning modern design with the combination of black ribbed back panels and stainless steel or brass fascia. Its full depth coal fuel bed offers a wonderful flickering glow and can fit into a pre-cast flue with a rebated surround.



The Linear Coal with brass fascia



The Linear Pebble with chrome fascia



The Linear coal with chrome fascia

The Linear Coal

Living Flame Effect - Full Depth Inset Radiant


Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant



Heat input - high	6.9kW
Heat input - low	4.2kW
Heat output - high	3.3kW
Heat output - low	1.5kW

Heat output figures stated above apply only to conventional flue models

For Powerflue dimensions see page 42



Dimensions of fire
A 485mm
B 594mm
C 550mm
D 327mm
E 170mm
F 110mm
G 365mm



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Powerflue



Ribbed Back



Manual Control



The Kenilworth with black trim and Black Balmoral fret

This full depth fire fits into a pre-cast flue with a 3" rebate on the fire surround. The 3.3kW heat output delivers generous warmth.



The Kenilworth with brass trim and Brass Balmoral fret




The Kenilworth brass with Grace fret




The Kenilworth silver with Grace fret

The Kenilworth

Living Flame Effect - Full Depth Inset Radiant



Dimensions of fire
 A 485mm
 B 594mm
 C 547mm
 D 326mm
 E 170mm
 F 110mm
 G 365mm

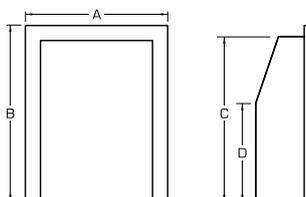

Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety
 Flame Supervision Device & Airwatch System

Type of heat
 Radiant

6.9kW
 4.2kW
 3.3kW
 1.5kW

Heat output figures stated above apply only to conventional flue models

For Powerflue dimensions see page 42



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Powerflue†



Plain Back



Manual Control



Remote Control

†not available with remote control



high efficiency

The Renoir has a highly reliable burner, which means beautiful flickering flames and glowing coals.

This traditional fire is 78% [net] efficient and is complemented by decorative brass effects.



The Renoir in bronze



The Renoir in black



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Plain Back



Manual Control



Remote Control

The Renoir

Living Flame Effect - Outset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high

6.0kW

Heat input - low

1.8kW

Heat output - high

4.3kW

Heat output - low



1.0kW

Dimensions of fire

A 684mm

B 703mm

C 324mm





high efficiency

This glass fronted convector fire has a 78% net efficiency and because it also offers a Balanced Flue* option, even those without a chimney can enjoy its charm. Incorporating the classical elegance of cast iron and side windows so flames can be seen from all angles.



Balanced flue model




The Emberglow

Living Flame Effect - Outset Convector

Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Dimensions of fire
A 673mm
B 708mm
C 324mm

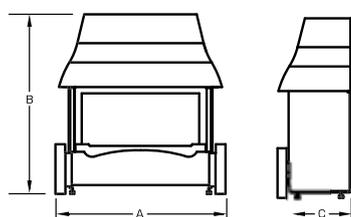

Heat input - high
Heat input - low
Heat output - high
Heat output - low

	Conventional Flue	Balanced Flue
High Heat Input	6.0kW	5.5kW
Low Heat Input	1.8kW	2.1kW
High Heat Output	4.3kW	4.3kW
Low Heat Output	1.0kW	1.2kW

For Balanced Flue dimensions see page 42

-  Natural Gas
-  LPG*
-  Brick Chimney
-  Pre-Fabricated (BS EN 185B)
-  Pre-Cast (BS EN 185B)
-  Balanced Flue
-  Plain Back
-  Remote Control
-  Manual Control

*not available on Balanced Flue model

One of the most popular radiant fires in the UK, The Regent is slim for a neat fit and is highly efficient for lower running costs. It gives out radiated and convected heat and is an elegant interpretation of the Regency period.



The Regent in bronze



The Regent in black



Natural Gas



Brick Chimney



Pre-Fabricated



Pre-Cast (BS EN 1858)



Manual Control

The Regent

Radiant - Outset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high

6.6kW

Heat input - low

1.2kW

Heat output - high

4.4kW

Heat output - low


0.6kW

Dimensions of fire

A 710mm

B 680mm

C 255mm

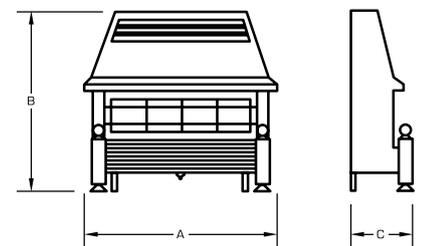




The Regent LFE in black



The Regent LFE in bronze

Dimensions of fire
 A 710mm
 B 680mm
 C 255mm

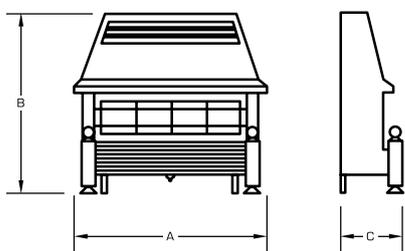

The Regent LFE

Living Flame Effect - Outset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

6.0kW
 1.4kW
 3.2kW
 0.8kW

Stylish elegance and practicality sum up the Regent living flame effect fire. Its flickering flames and glowing coals belie the fact that it is almost identical in running costs to a comparable radiant fire.



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast



Plain Back



Manual Control



Remote Control

The compact and economical Firenza can be wall or hearth mounted and has a control located on the top panel for ease of use.



The Firenza in black



The Firenza in bronze



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Top Control

The Firenza

Radiant - Outset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high

5.2kW

Heat input - low

1.2kW


Heat output - high

3.4kW

Heat output - low

0.6kW

Dimensions of fire
A 506mm
B 658mm
C 222mm

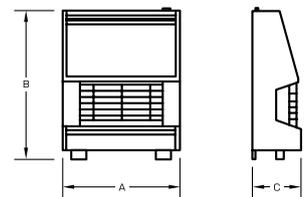



The Welcome in bronze

The Welcome's beautiful electrically illuminated coal effect brings life to the room even when it is turned off, providing a charming focal point to any room. It is also highly efficient resulting in lower running costs.



The Welcome in black


The Welcome Radiant - Outset Convector

Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Heat input - high	6.6kW
Heat input - low	1.2kW
Heat output - high	4.4kW
Heat output - low	0.8kW

Dimensions of fire
A 718mm
B 680mm
C 310mm

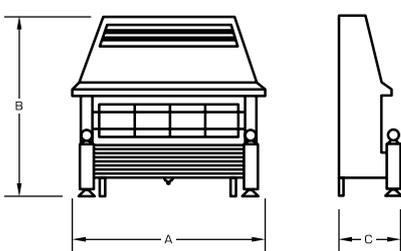

- 
 Natural Gas
- 
 Brick Chimney
- 
 Pre-Fabricated (BS EN 1858)
- 
 Pre-Cast
- 
 Manual Control



high efficiency

The Strata offers an incredible net efficiency of 84% and heat output of a radiant fire with a stylish contemporary look. Its soft, curved design offers a real alternative to most radiants and is available in black or brown finishes.



The Strata in black finish



The Strata in brown finish



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Top Control

The Strata

Radiant - Outset Convector

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

Heat input - high

6.9kW

Heat input - low

2.5kW

Heat output - high


5.2kW

Heat output - low

1.0kW

Dimensions of fire

- A 530mm
- B 715mm
- C 210mm
- D 60mm
- E 100mm

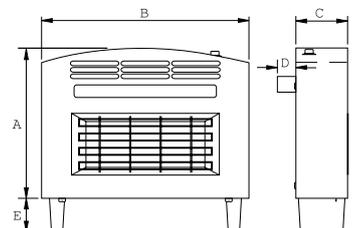




high efficiency

Incredible 84% net efficiency and adaptability; the real wood-cased Misermatic has them both. Available in either teak or mahogany finish, this fire can be wall or hearth mounted and with easily accessible top-mounted controls, it represents the ideal choice for any number of interiors.



The Misermatic with mahogany finish

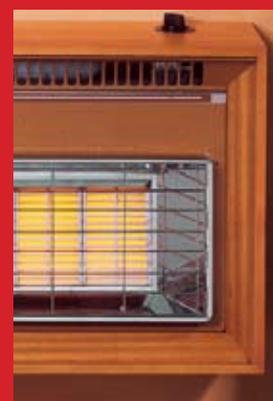


The Misermatic with teak finish

The Misermatic Radiant - Outset Convector

Dimensions of fire

- A 515mm
- B 800mm
- C 200mm
- D 60mm
- E 100mm

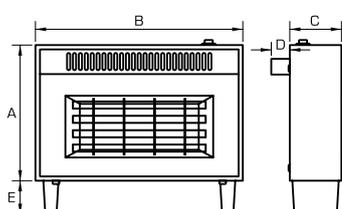

Heat input - high
 Heat input - low
 Heat output - high
 Heat output - low

Safety

Flame Supervision Device & Airwatch System

Type of heat

Radiant & Convected

6.9kW
 2.5kW
 5.2kW
 1.0kW



Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Top Control



high efficiency

The Renaissance provides a natural talking point the moment you enter the room. Its stylish retro design is matched by its forward thinking efficiency, simplicity of installation and impressive 5.2kW heat output.



Also available in black



The Renaissance in silver


The Renaissance Radiant - Outset Convector

Safety
Flame Supervision Device & Airwatch System

Type of heat
Radiant & Convected

Heat input - high	6.9kW
Heat input - low	2.5kW
Heat output - high	5.2kW
Heat output - low	1.0kW

Dimensions of fire
 A 652mm
 B 730mm
 C 200mm
 D 60mm
 E 37mm

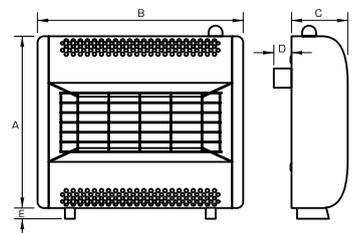

Natural Gas



Brick Chimney



Pre-Fabricated (BS EN 1858)



Pre-Cast (BS EN 1858)



Top Control



high efficiency

The Thurcroft flueless stove is the ideal mobile gas appliance with a living flame effect that provides the warmth, appearance and atmosphere of a traditional stove. A self contained 7kg Butane gas cylinder* housed within the body of the stove provides up to 60 hours burning time.



The Thurcroft Flueless Stove

Safety

Flame Supervision Device & Oxygen Depletion Sensor

Type of heat

Radiant & Convected




Butane
LPG*



Manual
Control

Dimensions of fire
A 370mm
B 712mm
C 445mm
D 200mm
E 145mm

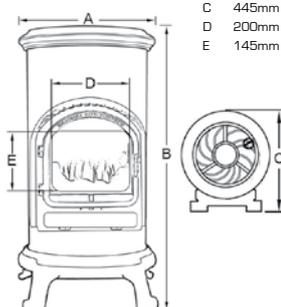

Heat input - high
Heat input - low
Heat output - high

2.6kW
2.0kW
2.6kW

* Not included with the appliance.

For details on how to obtain a Butane gas cylinder please call 0870 241 1603 or visit www.calorgas.co.uk


Sizes and Dimensions

Every fire in this brochure has a diagram illustrating approximate dimensions, so you know whether it will fit into your home. Individual model dimensions are detailed on each product

page, whilst dimensions of those models with a Powerflue or Balanced Flue option are shown below.

The Warwick Powerflue

page 21

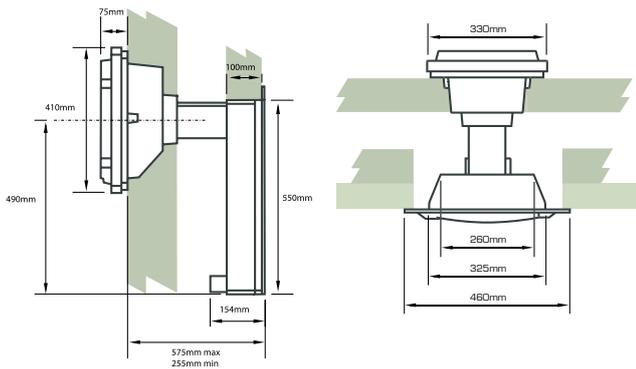


Side View

Top View

The Linear & Kenilworth Powerflue

pages 30 & 31

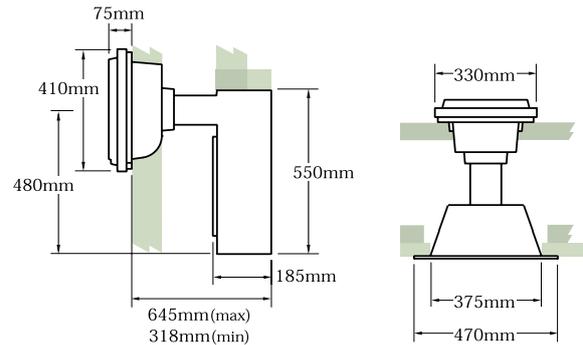


Side View

Top View

The Emberglow Balanced Flue

page 33

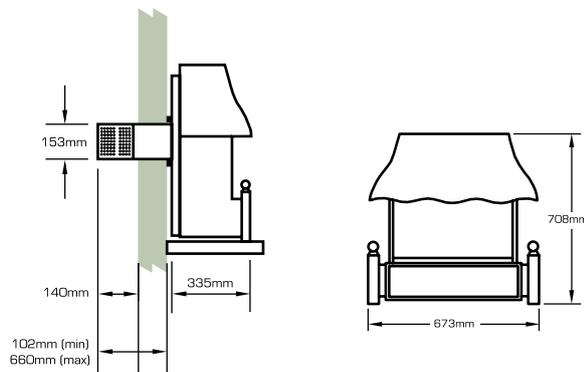


Side View

Front View

The Atlanta Balanced Flue

page 22

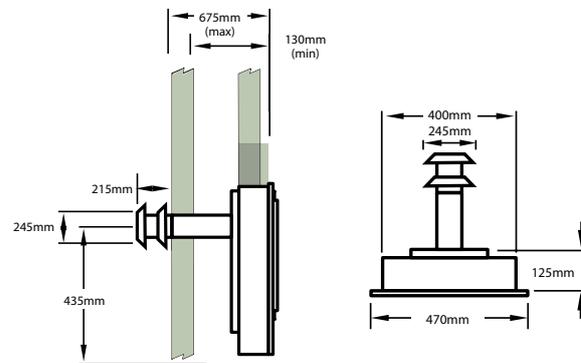

Side View

Top View

Please confirm your flue type by consulting your Flavel stockist before purchase.

Please note that the dimensions on the diagrams are intended as a guide only. For the exact dimensions, please consult the latest issue of the manufacturer's installation instructions.

N.B. If required, more detailed technical specification information is available from your Flavel stockist.

Flavel recommends that all gas appliances should be serviced annually by a Gas Safe Registered engineer to ensure continued safe operation and optimum performance throughout the lifetime of the product. This is in line with good gas industry practice.

Builders' Opening sizes

	height minimum	height maximum	width minimum	width maximum
GAS FIRES				
Diamond HE	550	570	370	450
Caress HE	555	570	400	450
Kenilworth HE	550	570	370	450
Linear HE	550	570	370	450
Raglan HE	555	560	410	430
Orchestra HE	555	560	410	430
Curve	300	440	300	400
Vesta	490	500	350	400
Finesse	555	570	335	430
Diamond	550	570	375	440
Stirling	555	570	330	430
Windsor	555	570	335	430
Caress Slimline MC	550	575	330	440
Caress Slimline SC	550	565	330	430
Warwick	555	570	335	430
Atlanta	555	560	380	425
Melody	555	570	335	430
Waverley	N/A	N/A	N/A	N/A
Richmond	555	570	405	440
Caress	550	570	400	450
Calypso	555	570	405	440
Rhapsody	555	570	405	440
Linear	555	570	375	440
Kenilworth	555	570	375	440
Renoir	525	650	305	440
Emberglow	525	650	305	440
Emberglow BF	N/A	N/A	N/A	N/A
Regent LFE/Regent	525	650	305	440
Firenza	510	650	305	440
Welcome	525	650	305	440
Strata	522	650	305	440
Misermatic	522	650	305	440
Renaissance	580	650	305	440

Please refer to installation guides for exact dimensions. BFM Europe cannot be held responsible for any building work undertaken prior to purchasing your fire. For more information you can download installation manuals for any Flavel product from our website - www.bfm-europe.com



In addition to producing fires that not only look fantastic, and are highly efficient, one of Flavel's key objectives is to make life as simple and hassle free as possible for the Installer.

Many time-saving features have been designed into the manufacturing process. As a result we are confident that once an Installer has fitted a Flavel fire they will not want to fit anything else!

1 Fixing wire kit

Flavel fires come with a fixing kit containing wire and fixing eyes that eliminate the need to drill the back panel

2 Accessible gas connection

The gas connection on Flavel insets is located front left of the control panel for easy access

3 Flange seal

Flavel's foam seal eliminates the requirement of sealing the fire box to the back panel

4 Step by step Installation instructions

Comprehensive yet easy to understand installation instructions are downloadable at www.gas-fires.co.uk

5 Pre-cut gas entry points

Numerous pre-cut flaps in the metal fire box allow the installer to bring in the gas pipe at the most suitable point

6 Easy burner assembly removal

The burner can be removed as a complete assembly, enabling easier installation and servicing

7 Restrictor elbow included

Flavel fires come with a restrictor elbow to isolate the gas supply. These are located at the front left of the control panel for ease of access





WARNING: BFM Europe Limited is a Gas Safe Registered company. We recommend that all of our fires are installed by Gas Safe Registered engineers in accordance with our instructions.

DISCLAIMER: Our policy is one of constant development and improvement. We therefore reserve the right to revise designs and specifications of our gas fires and other products without formal notice, patents pending. BFM Europe Limited has taken every care in the preparation of information contained in this brochure, but we accept no liability for any loss or damage arising directly or indirectly from the use of this brochure. (This brochure is copyright 2009 and must not be reproduced in whole or in any part without prior written permission). N.B. Gas consumption figures relate to Natural Gas and are correct at time of going to press. BFM Europe Limited recommends that its fires be used in conjunction with central heating and not as a main source of heating.

Issue No. 19

We would like to thank Phoenix Fireplaces (01905) 423178), Antiquity (0114 231 4666), Kedleston Heating (01332 200303), Olde England Reproductions (01782 319350) and Stanningley Firesides (0113 257 1512) for contributing fire surrounds to this brochure.



Makes anywhere feel like home

BFM Europe Limited, Trentham Lakes, Stoke-on-Trent, Staffordshire ST4 4TJ.
Tel: 01782 339000. Fax: 01782 339009. www.bfm-europe.com e-mail: info@bfm-europe.com